
H-BEAM GUARD CLAMP
工字護欄扣

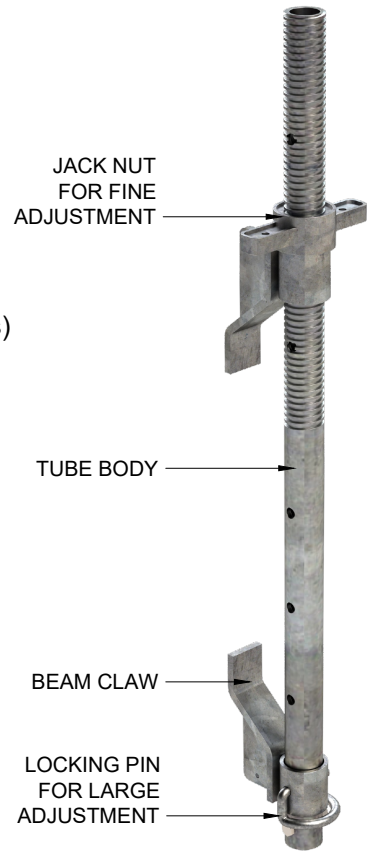

ADVANTAGES

- Modified from design concept of I-Beam Catch Base
  改進自工字通道底桿的設計概念
- Developed for steel struts with "H" cross-section (vertical standing flanges)
  專為具有「H」型橫截面（垂直立柱翼緣）的鋼支柱而開發
- Compatible with Ringlock system and scaffold tubes, couplers
  相容於碟型組合通架、腳手架鋼管及扣件
- No tools required for installation
  不需要使用工具


Note: Since the jack nut can be adjusted flexibly, maintain 150mm min. above the jack nut to ensure sufficient overlap length for the installation of side protection so that rigidity can be ensured.

Item Code	Compatible Flange Size		Weight
	Thickness	Width	
TGR-HBGC	55	500	5.5 kg

Guard Clamp Example



VIDEO
Instruction Video
使用說明視頻

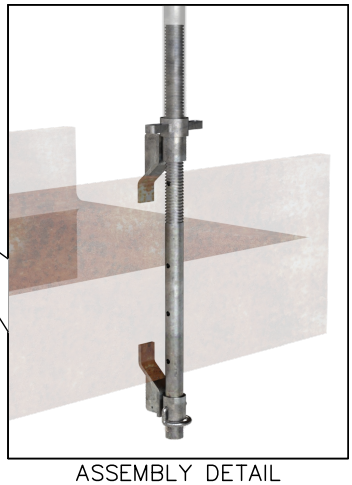
ASSEMBLY DETAIL

Website : http://www.canyonhk.com Tel : (852) 2885 9633 Fax : (852) 2567 1611 Email : general@canyonhk.com

* All weights stated in catalog are for reference only.