SHEET PILE GUARD POST
臨時閘板護欄

PATENT NO: HK30036221

Innovative design developed by CMS Engineering, this guard post is suitable for assisting all your construction needs.






It is recommended to install the clamp on corner of sheet pile to increase rigidity for the guard post. 建議將夾具安裝在閘板的拐角處，可以增加閘板護欄的剛度。

Sheet Pile Guard Post 臨時閘板護欄			
Item Code	Length	Claw THK.	Weight
TGR-SPGP	1200 mm	Max. 25 mm	6.4 kg
Sheet Pile Guard Post 臨時閘板護欄 **(Customized Model,** 可訂製之款式**)**			
TGR-SPGP50A #	1200 mm	Max. 50 mm	6.6 kg
TGR-SPGP80A #	1200 mm	Max. 80 mm	6.8 kg

No existing stock available, lead time for MADE-TO-ORDER items is 6-8 weeks.





View from top of guard post, dotted lines represent stand that clamp securely grips on; cross section of guard clamp are indicated in drawings.


ADVANTAGES 優點

- Strong and durable design
  堅固耐用
- Clamp design ensures safety to hold up guard post
  設計安全
- Does not require additional accessories
  無小配件，方便搬運
- Can be combined with scaffold tube and coupler to construct guardrails
  配合喉通及手扣可作護欄使用

VIDEO
Instruction Video
使用說明視頻

Website : http://www.canyonhk.com Tel : (852) 2885 9633 Fax : (852) 2567 1611 Email : general@canyonhk.com


* All weights stated in catalog are for reference only.

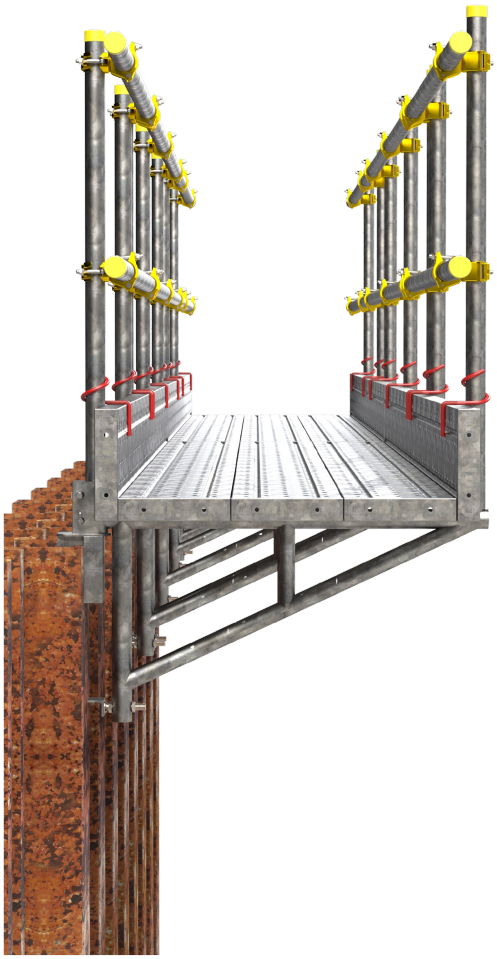


CANTILEVER SUPPORT BRACKET
懸臂架

ADVANTAGES 優點

- Cantilever support bracket designed to hold up steel plank for walking in construction zones
  懸臂架配合橋板可作通道用
- Strong and sturdy design
  堅固耐用
- Scaffold tube joint pin embedded at the end of support bracket to install scaffold tubes as temporary guardrail
  預設駁心可安裝喉通作通道護欄
- Easy installation, no hand tools are required
  設計簡便，無須任何工具安裝
- Design of cantilever bracket allows for loading capacity of 1.5 kN/m^2 on the extended platform
  擴展平台在懸臂架上的設計承載能力為 1.5 kN/m^2

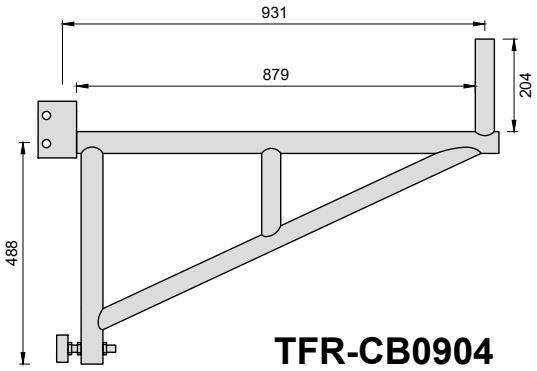

TFR-CB0904

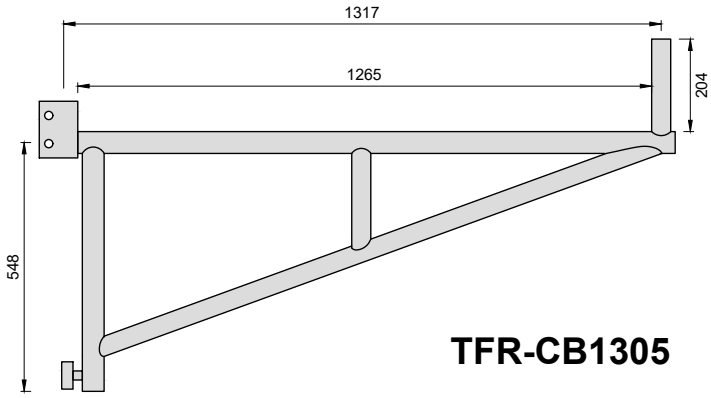

TFR-CB1305



Description	Cantilever Support Bracket 三角支撐	
Item Code	***TFR-CB0904***	***TFR-CB1305***
Length	931 mm	1317 mm
Height	488 mm	548 mm
Weight	7.6 kg	9.6 kg
Safety Working Load	5 kN/m	2.5 kN/m